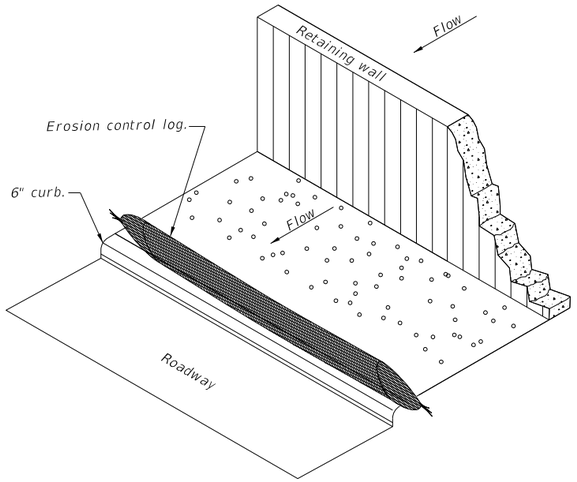

RETAINING WALL
EROSION CONTROL LOG

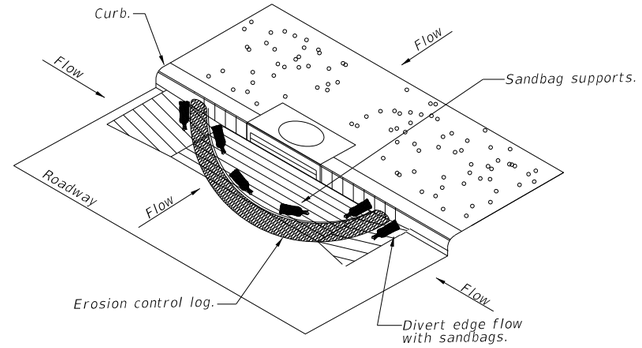

CURB INLET
EROSION CONTROL LOG

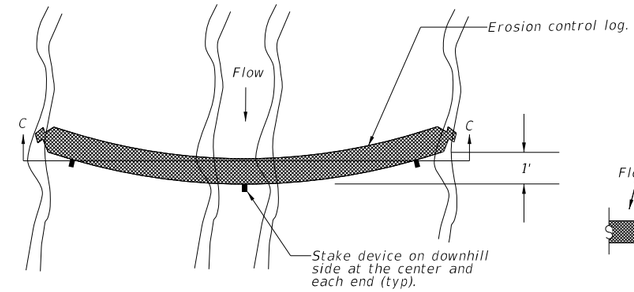

PLAN VIEW

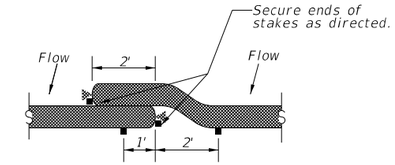

TYPICAL LAP DETAIL

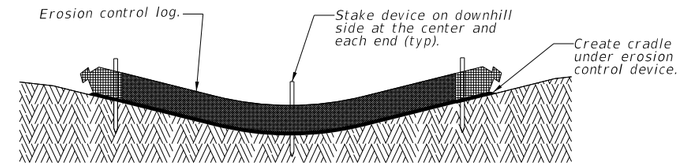

SECTION C-C

DOWNSTREAM EROSION CONTROL LOG

PAY ITEMS

0506 6035	SANDBAGS FOR EROSION CONTROL	EA
0506 6040	BIODEG EROSN CONT LOGS (INSTL) (8")	LF
0506 6041	BIODEG EROSN CONT LOGS (INSTL) (12")	LF
0506 6042	BIODEG EROSN CONT LOGS (INSTL) (18")	LF
0506 6043	BIODEG EROSN CONT LOGS (REMOVE)	LF

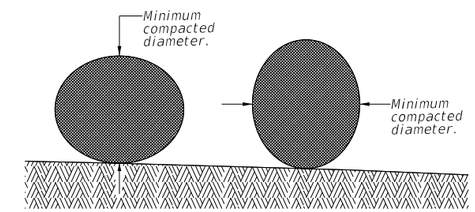

DIAMETER MEASUREMENTS OF
EROSION CONTROL LOGS

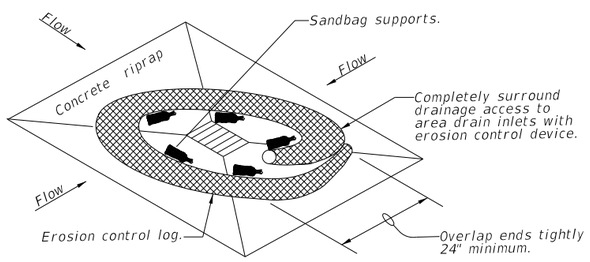

DROP INLET
EROSION CONTROL LOG

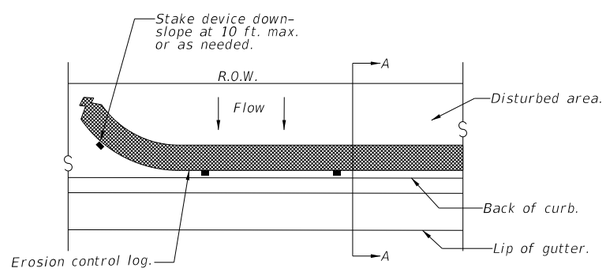

PLAN VIEW

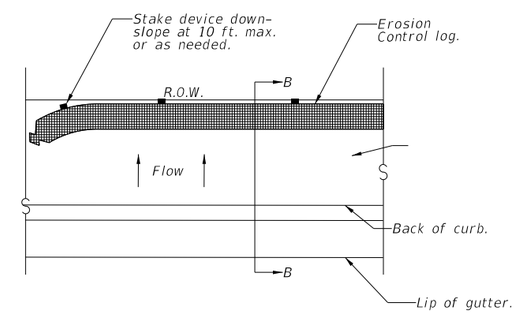

PLAN VIEW

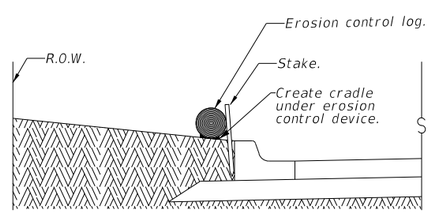

SECTION A-A

BACK OF CURB
EROSION CONTROL LOG

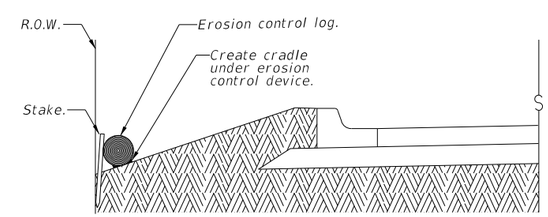

SECTION B-B

EDGE OF RIGHT-OF-WAY
EROSION CONTROL LOG

GENERAL NOTES

1. Furnish core material consisting of compost, mulch, aspen excelsior wood fibers, chipped site vegetation, coconut fiber, or 100% recyclable fibers.
2. Erosion control logs that are not designated for removal are considered temporary installations. For temporary erosion control logs, slice open the containment mesh and spread the core material evenly.
3. Recommended locations of erosion control logs include:
   a) Within drainage ditches spaced at ±500 ft. on center,
   b) Immediately preceding ditches, curb inlets and drop inlets,
   c) Just before the drainage enters a water course, and
   d) Just before the drainage leaves the right-of-way.
4. Erosion control logs should be cleaned when the capacity has been reduced by one half or the sediment has accumulated to a depth of one foot, whichever is less.
5. Laps will not be measured or paid separately.

STATE OF TEXAS
MICHAEL C. COYLE
95634
LICENSED
PROFESSIONAL ENGINEER

NOT TO SCALE

REV. NO.	DATE	DESCRIPTION	BY

LJA Engineering, Inc.
FRN-F-1386

THE CITY OF SAN ANGELO TEXAS

SOUTHLAND BOULEVARD
BIODEGRADABLE EROSION
CONTROL LOG DETAILS

SHEET 1 OF 1

SHEET NO. 65

11:49:30 AM 9/23/2016
T:\2357\1601\CADD\SHEETS\10-Env\SB-EM01.dgn